




PCI Host Controller 14a


Sheet 1 of 9

Revision: 1.2 (January 20, 2016)

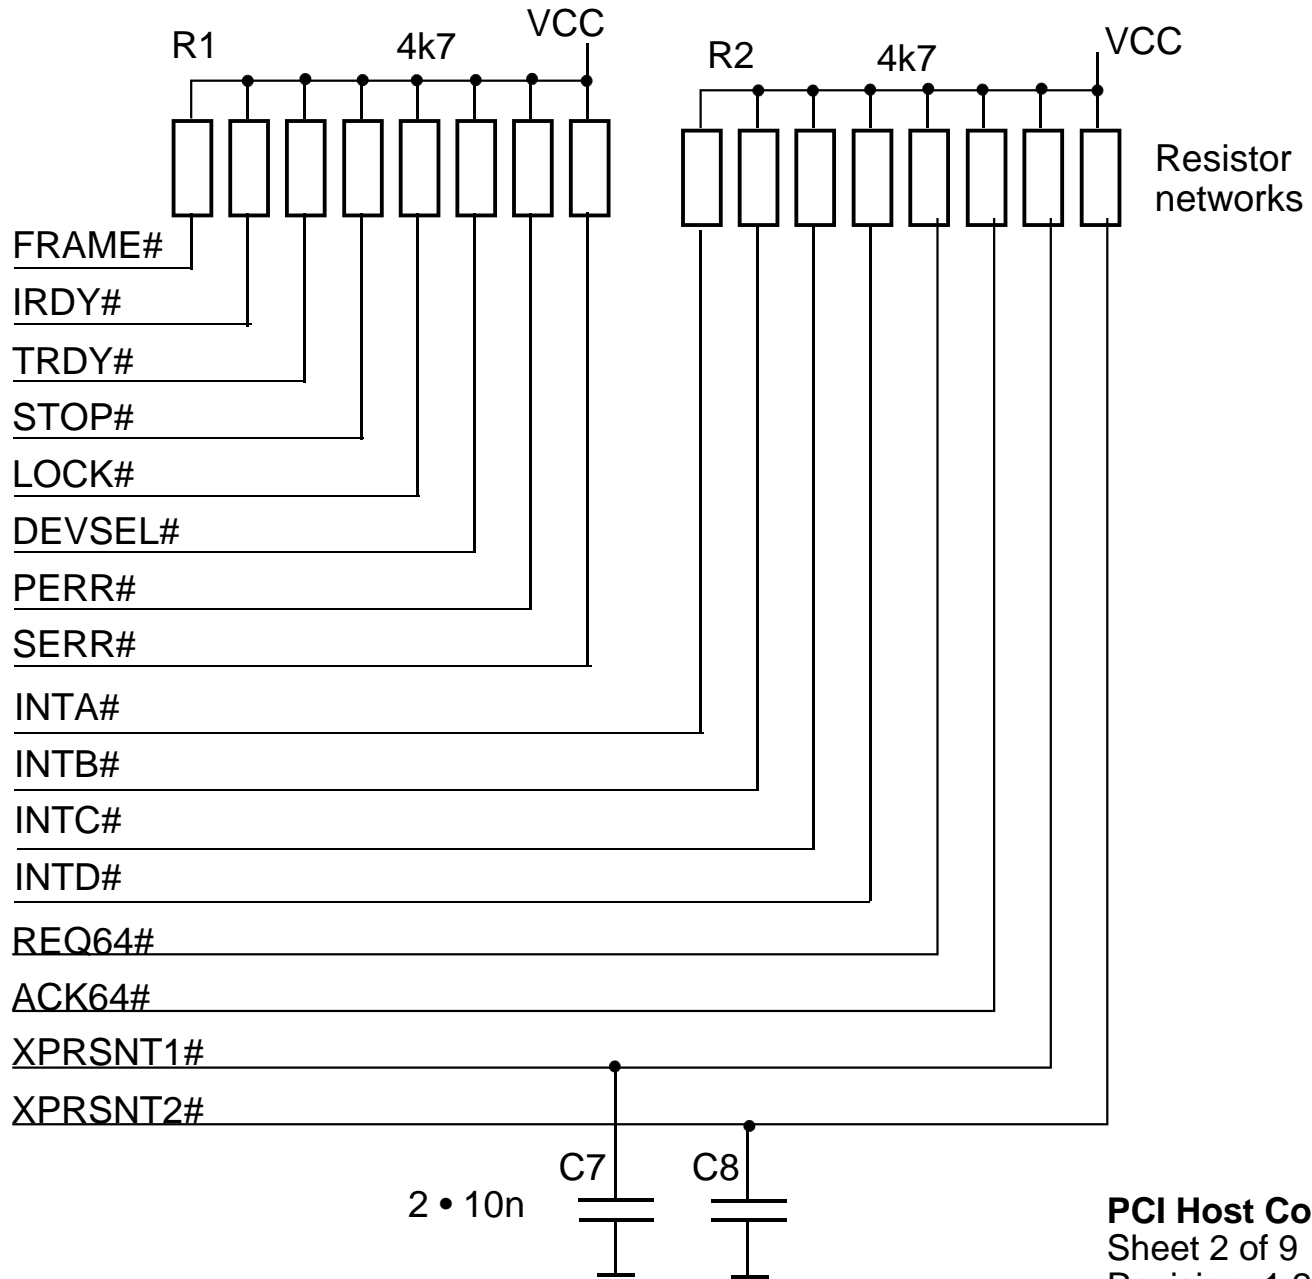

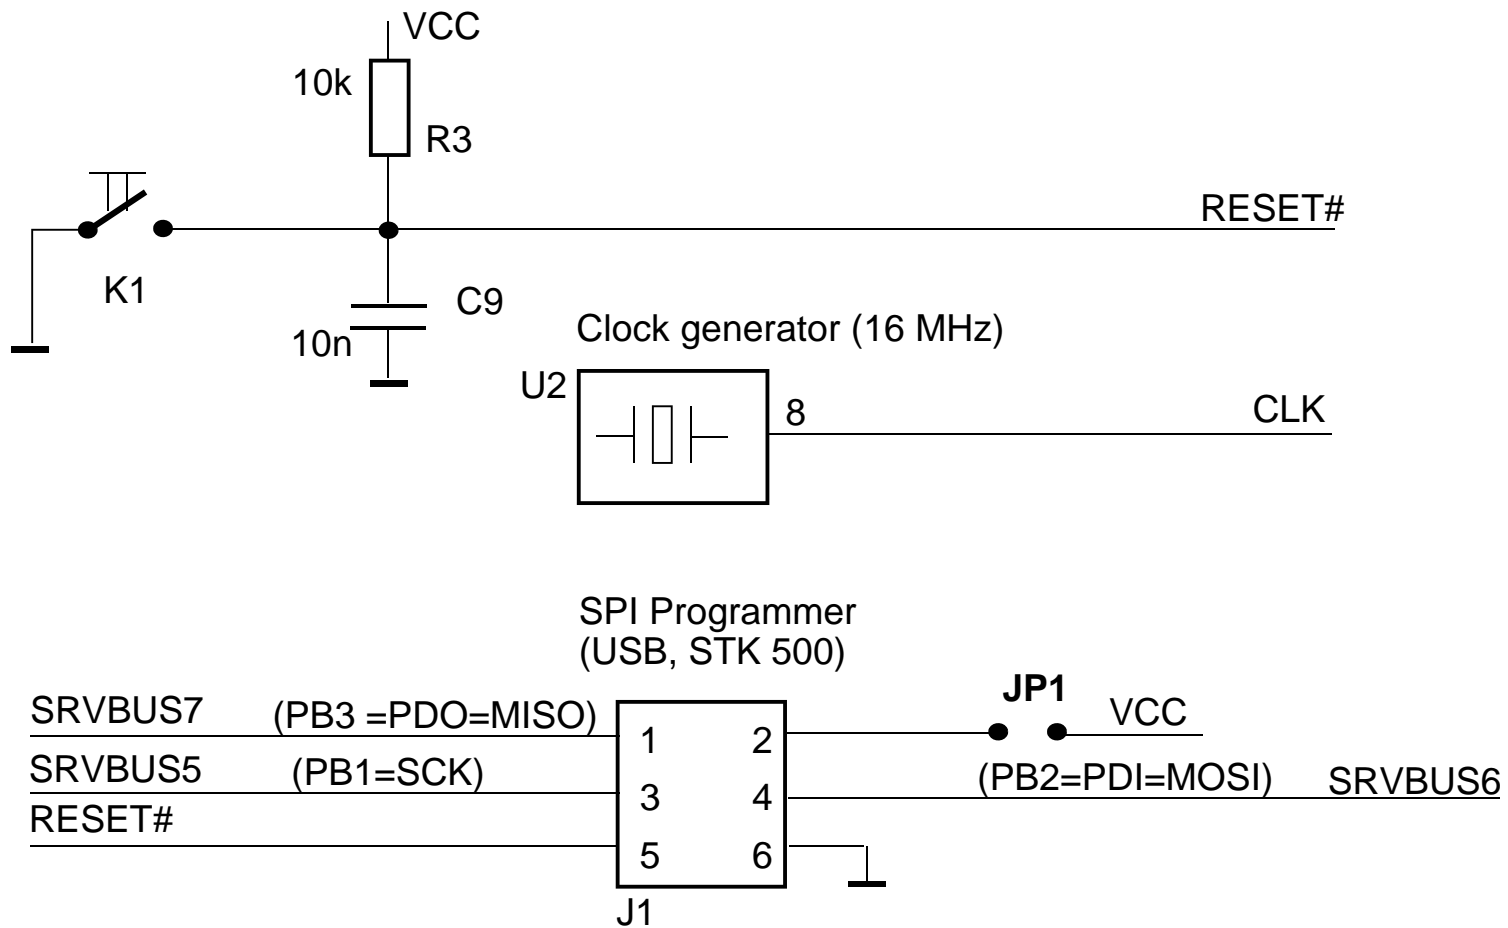

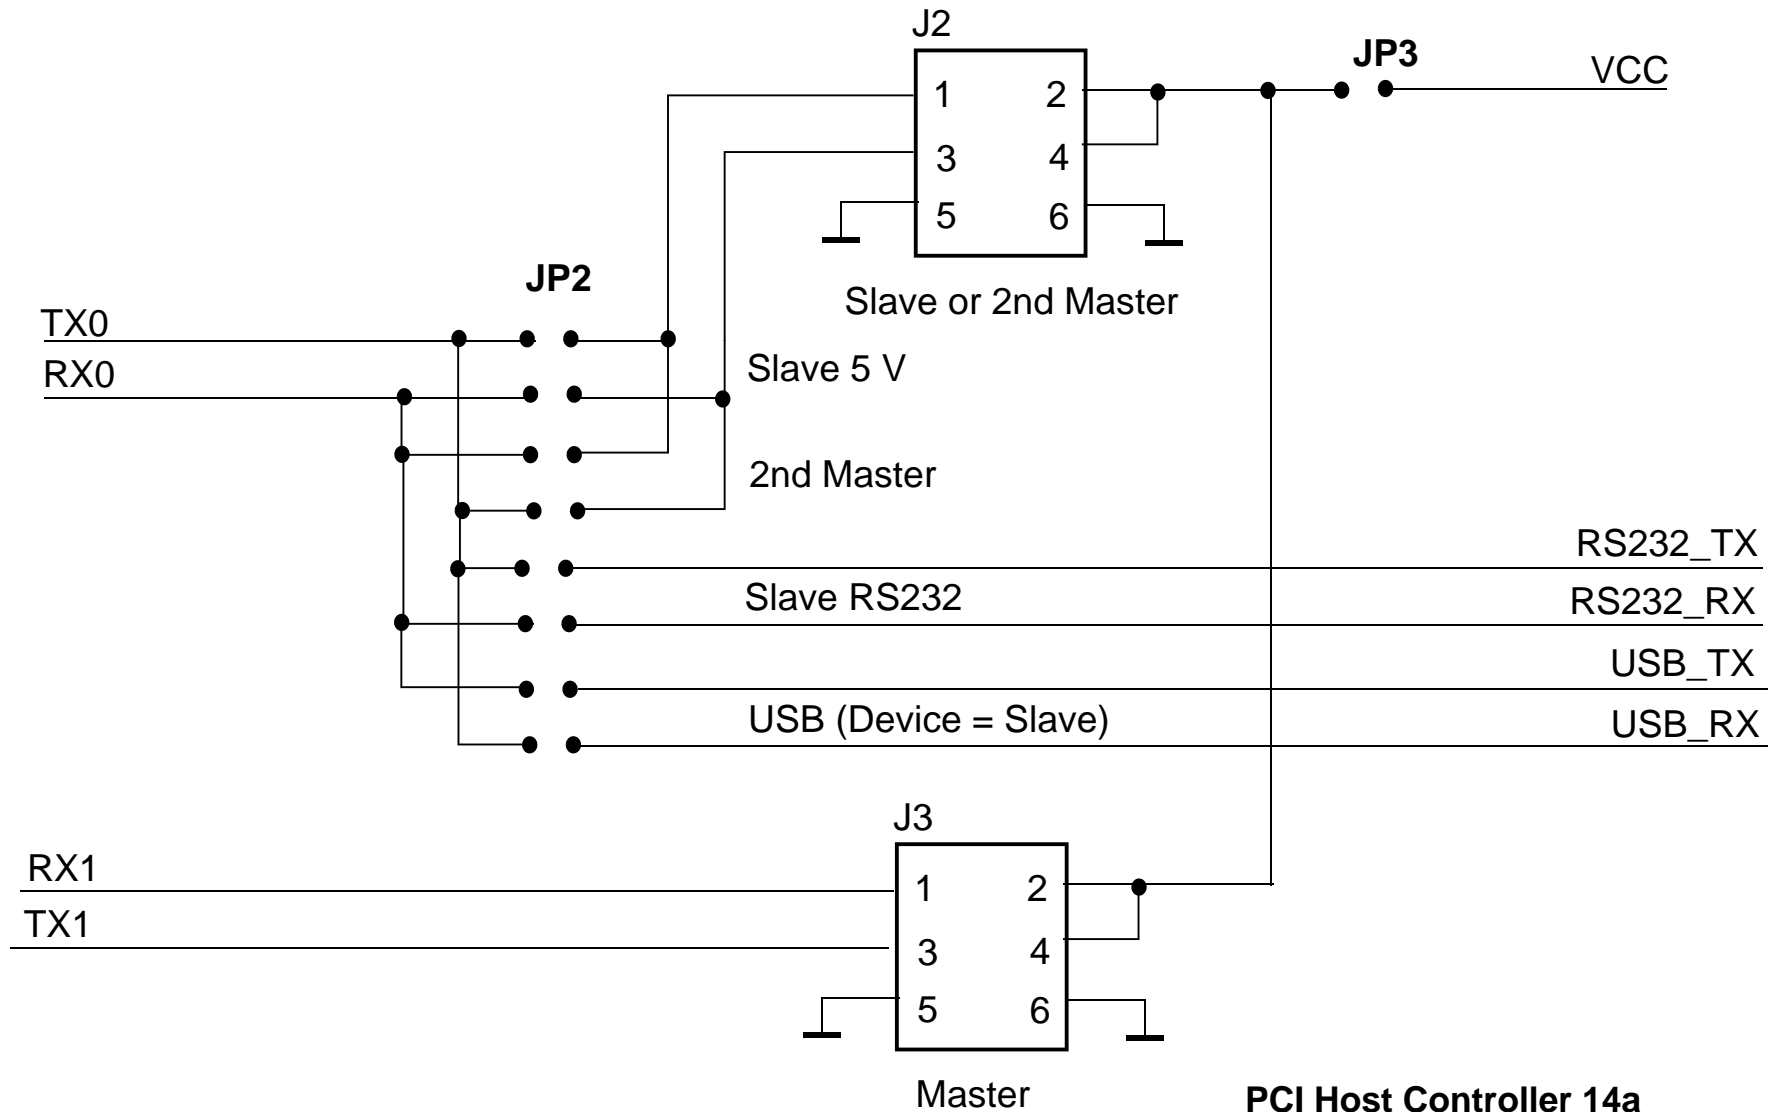

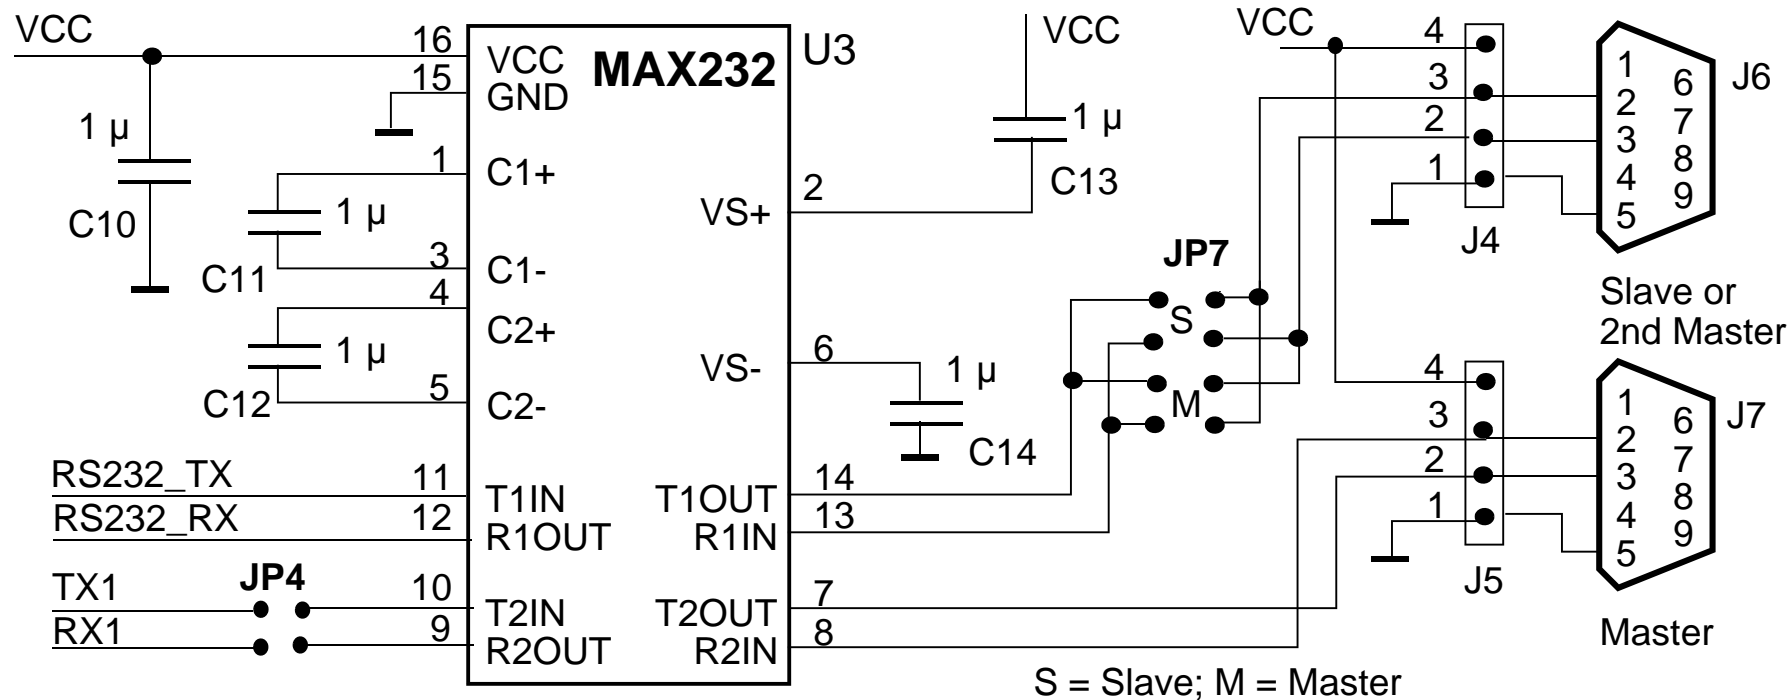


A Slave is a DCE device, like every RS-232 device downstream of a personal computer. The RS232-connector is a female DSub9 connector with TX on pin 2, RX on pin 3.


A Master is a DTE device. The RS232-connector is a male DSub9 connector with TX on pin 3, RX on pin 2. If J8 is a female DSub9, an appropriate gender changer may be required.

PCI Host Controller 14a

Sheet 5 of 9

Revision: 1.2 (January 20, 2016)

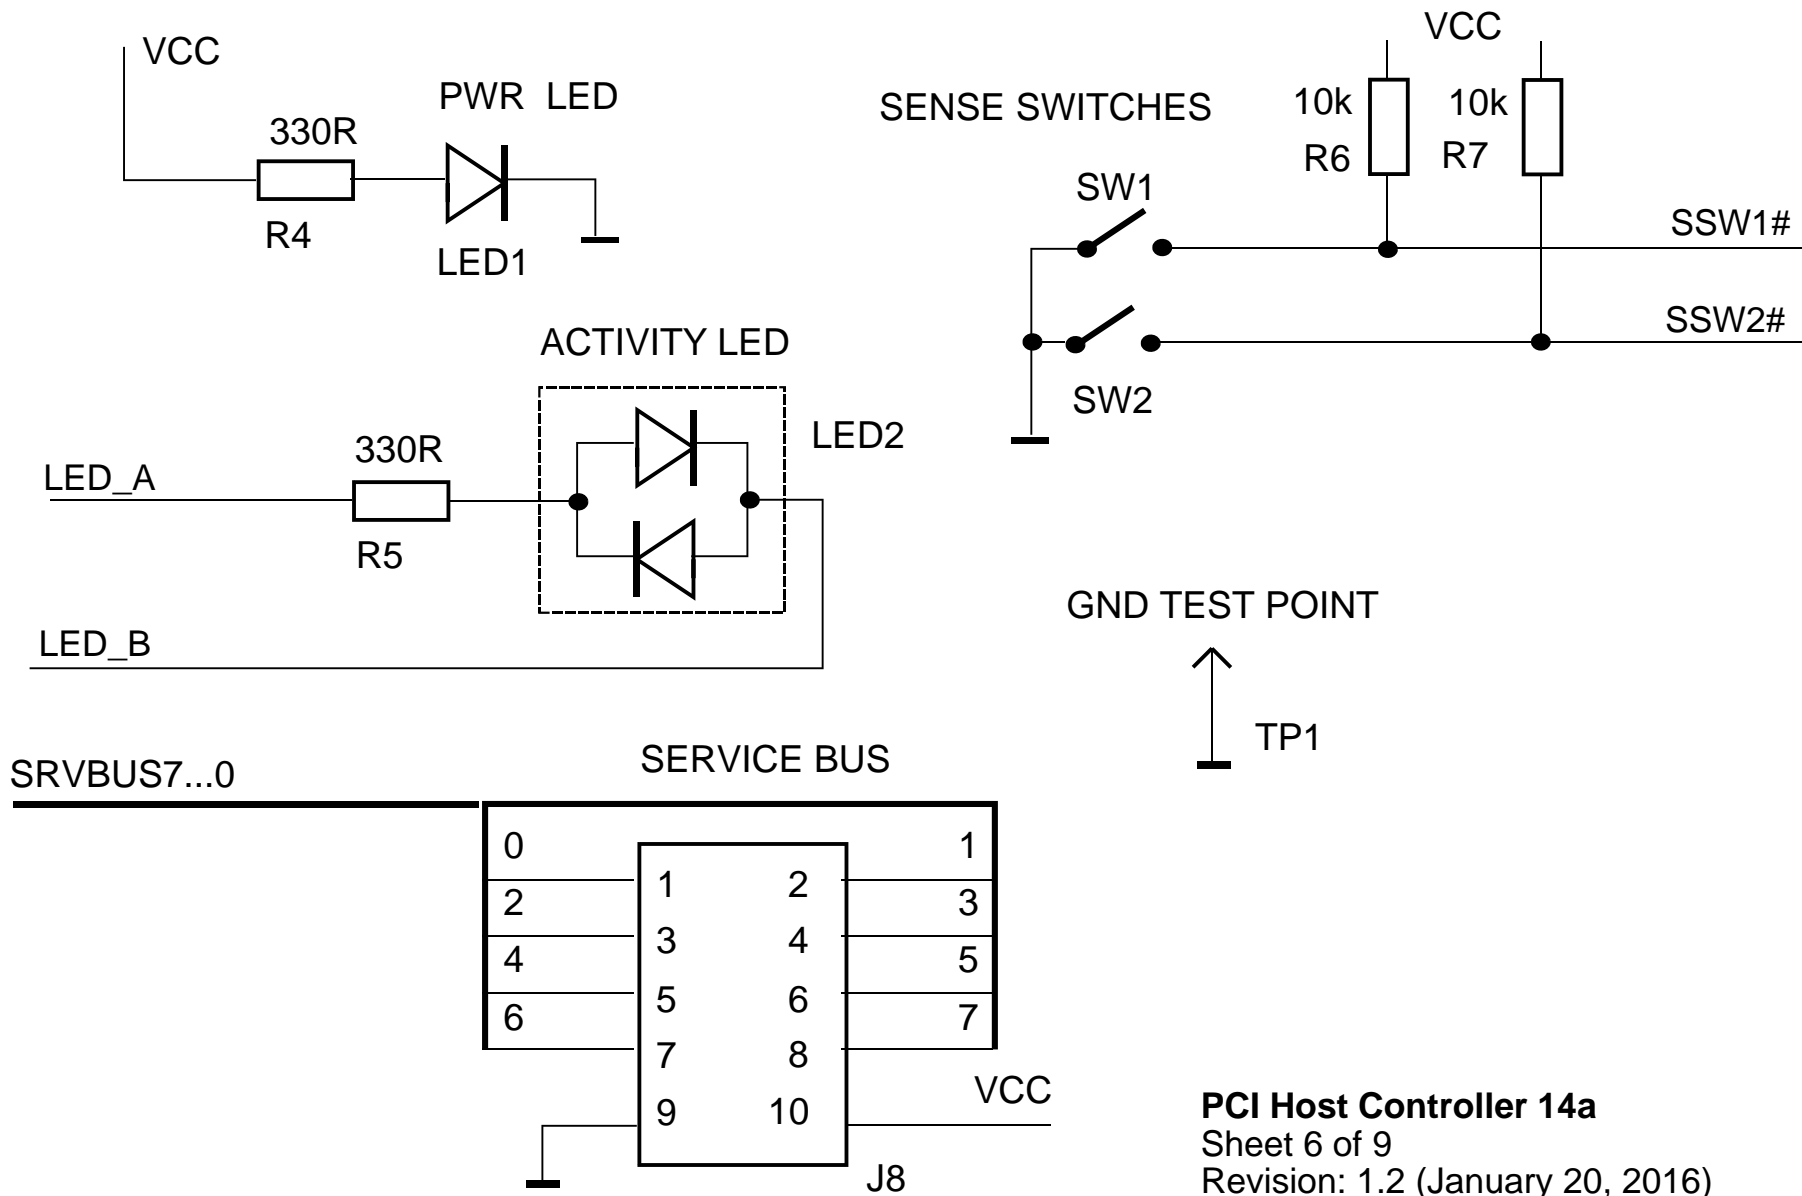

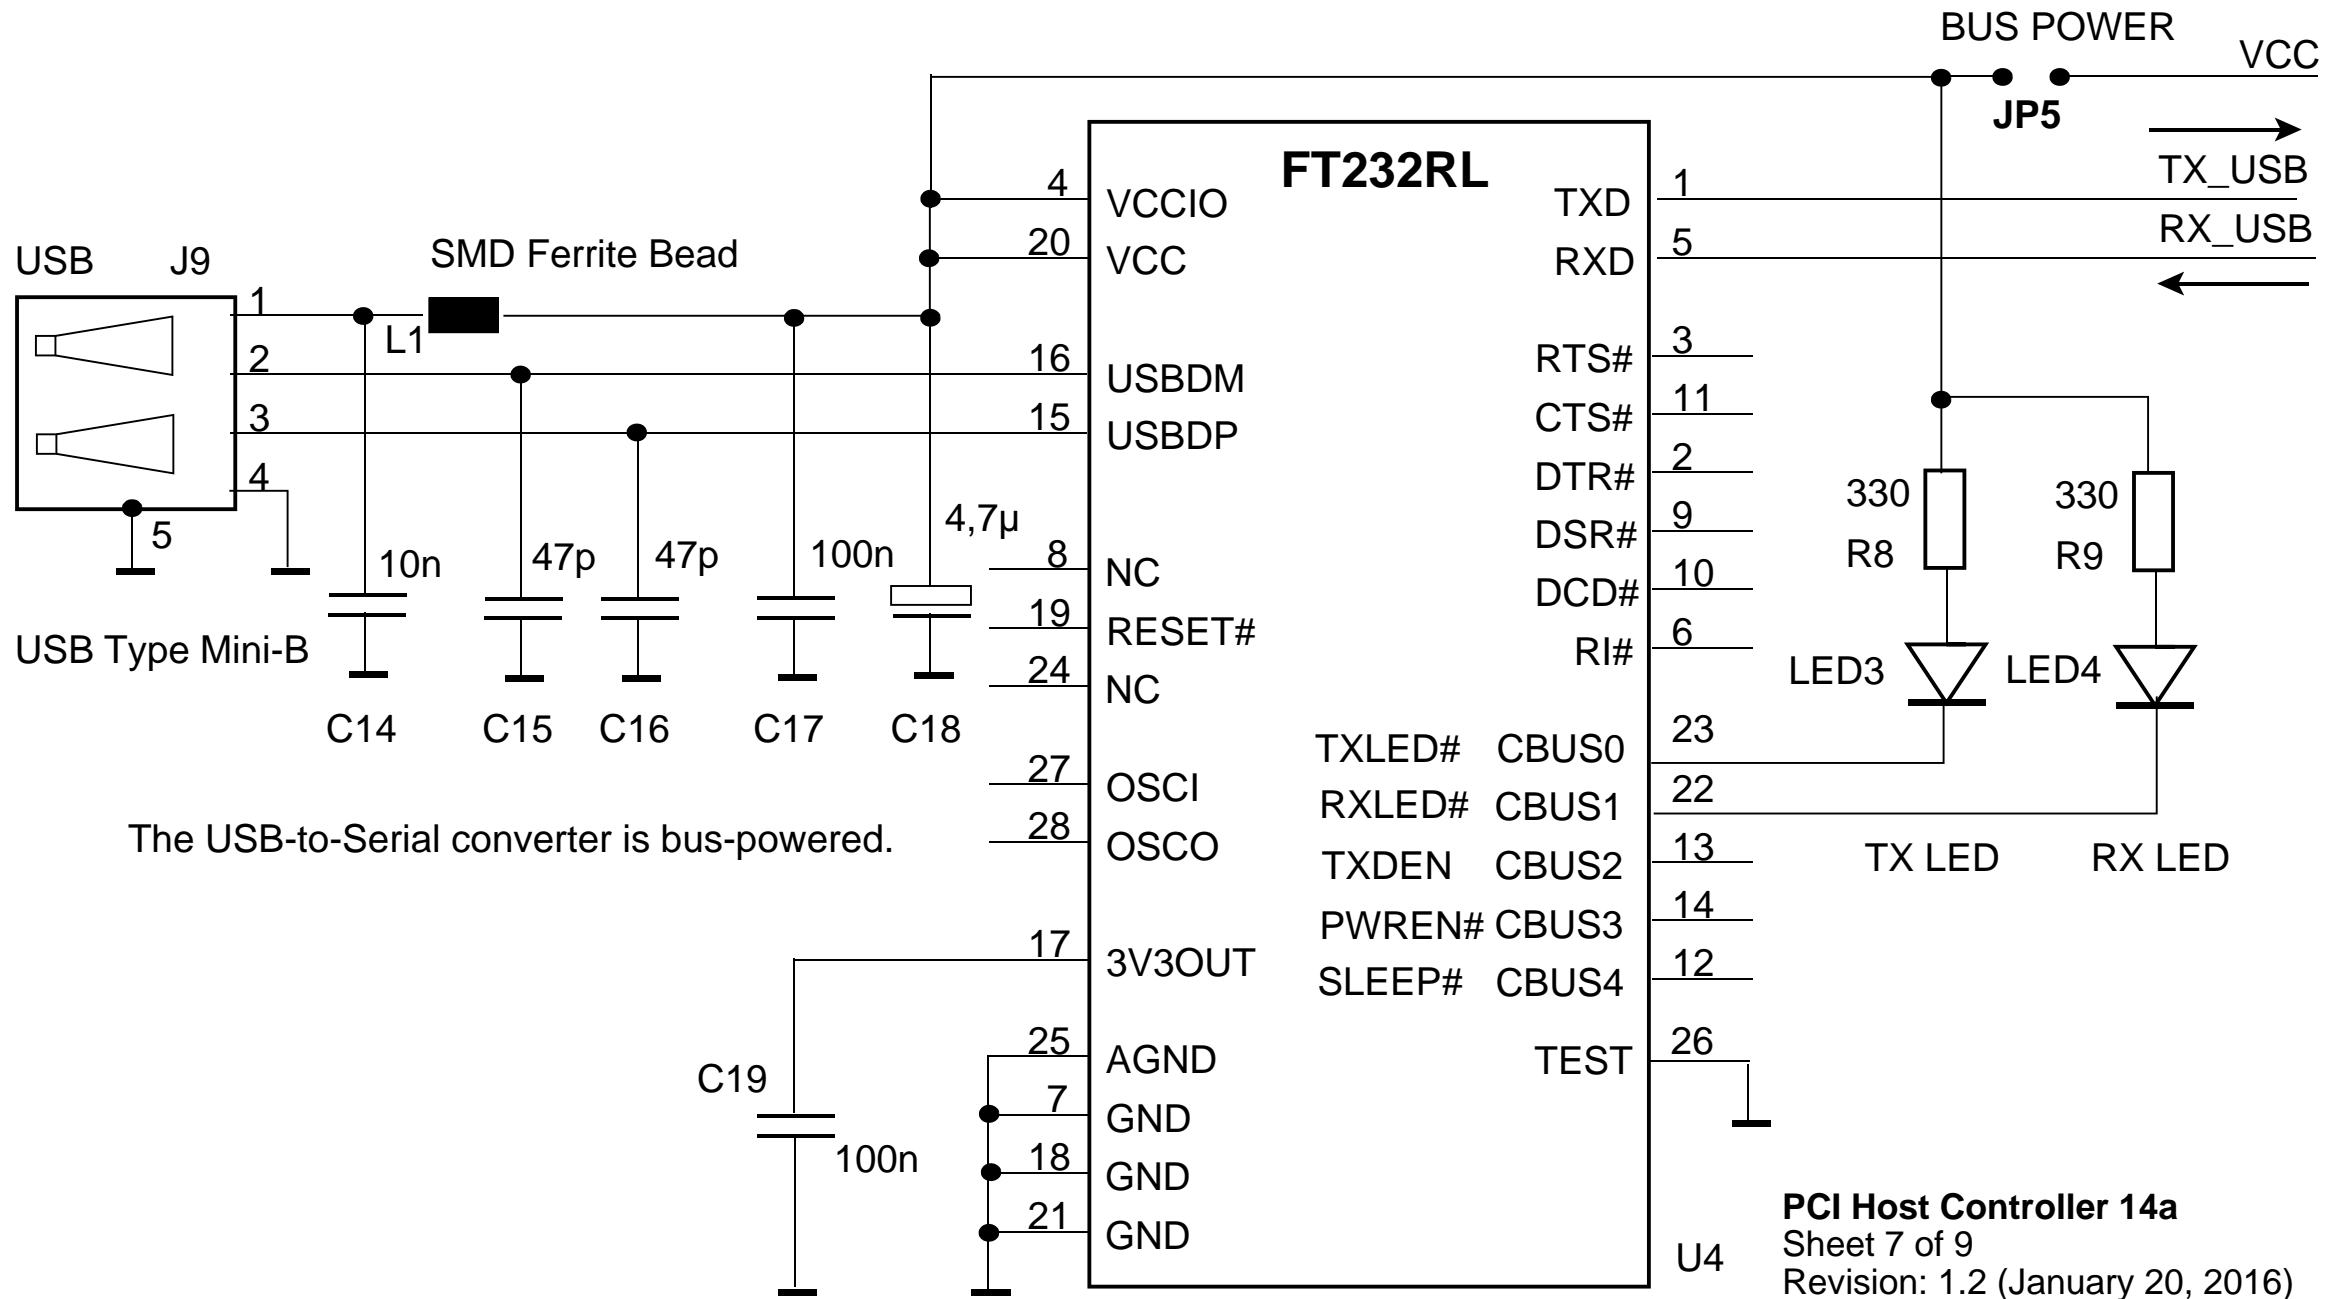

	A
GND	1
VIO	2
AD05	3
C/BE0#	4
GND	5
AD11	6
AD14	7
V3V	8
SERR#	9
GND	10
STOP#	11
V3V	12
FRAME#	13
GND	14
AD18	15
AD21	16
V3V	17
IDSEL0	18
AD24	19
GND	20
AD29	21
V5V	22
REQ0#	23
GND	24
GNT1#	25
V5V	26
CLK2	27
GND	28
V12P	29
V12M	30

	B
V5VSB	1
AD02	2
GND	3
AD07	4
AD09	5
VIO	6
AD13	7
C/BE1#	8
GND	9
PERR#	10
V3V	11
TRDY#	12
GND	13
AD16	14
V3V	15
AD20	16
AD23	17
GND	18
C/BE3#	19
AD26	20
V5V	21
AD30	22
GND	23
REQ2#	24
VIO	25
CLK0	26
V5V	27
INTD#	28
INTA#	29
REQ3#	30

	C
V5V	1
AD01	2
AD04	3
GND	4
AD08	5
AD10	6
GND	7
AD15	8
PSON#	9
V3V	10
LOCK#	11
GND	12
IRDY#	13
V3V	14
AD17	15
GND	16
AD22	17
IDSEL1	18
VIO	19
AD25	20
AD28	21
GND	22
REQ1#	23
V5V	24
GNT2#	25
GND	26
CLK3	27
V5V	28
INTB#	29
GNT3#	30


	D
AD00	1
V5V	2
AD03	3
AD06	4
GND	5
M66EN	6
AD12	7
V3V	8
PAR	9
PME#	10
GND	11
DEVSEL#	12
V3V	13
C/BE2#	14
GND	15
AD19	16
V3V	17
IDSEL2	18
IDSEL3	19
GND	20
AD27	21
AD31	22
VIO	23
GNT0#	24
GND	25
CLK1	26
GND	27
RST#	28
INTC#	29
GND	30

J10: PCI/104 Connector

PCI Host Controller 14a

Sheet 8 of 9

Revision: 1.2 (January 20, 2016)

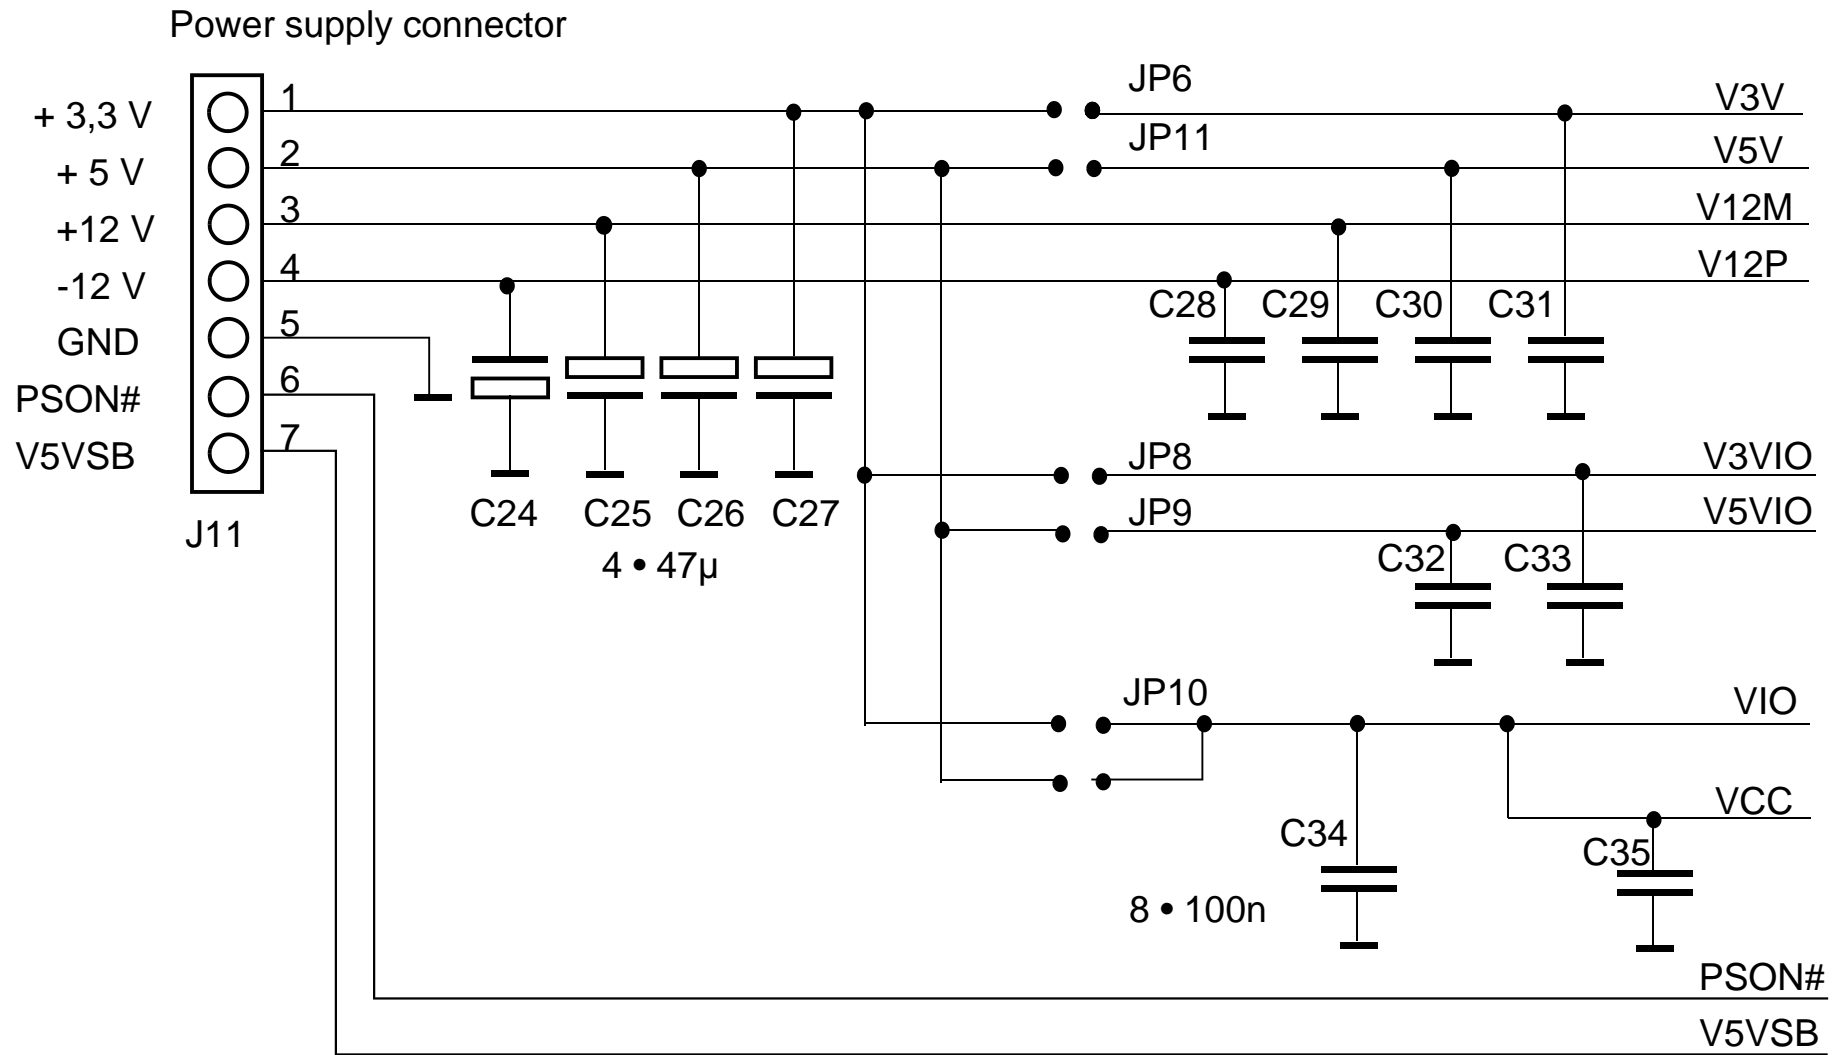

PCI Host Controller 14a

Sheet 9 of 9

Revision: 1.2 (January 20, 2016)