


A Slave is a DCE device, like every RS-232 device downstream of a personal computer. The RS232-connector is a female DSub9 connector with TX on pin 2, RX on pin 3.

A Master is a DTE device. The RS232-connector is a male DSub9 connector with TX on pin 3, RX on pin 2. If J8 is a female DSub9, an appropriate gender changer may be required.


### ISA Host Controller 15b


Sheet 7 of 10

Revision: 1.2 (January 20, 2016)

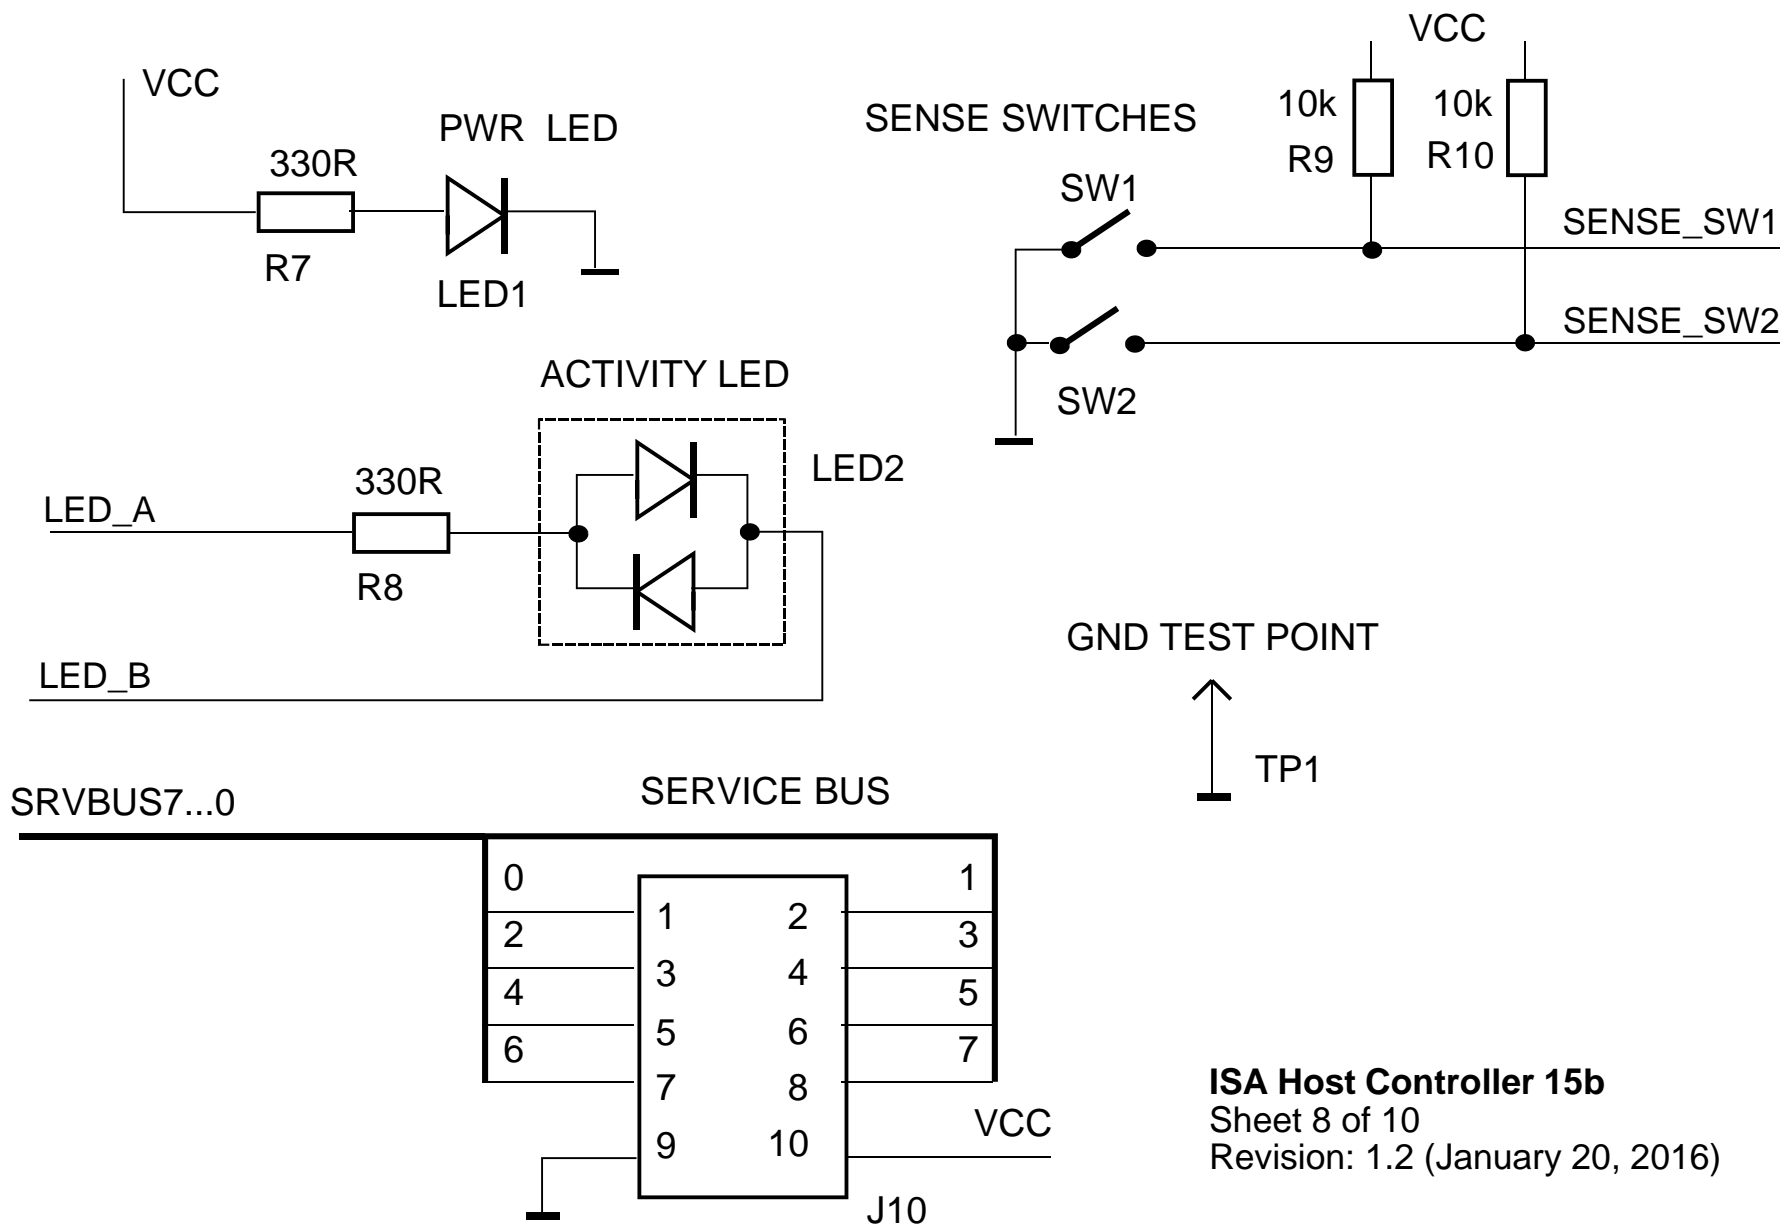




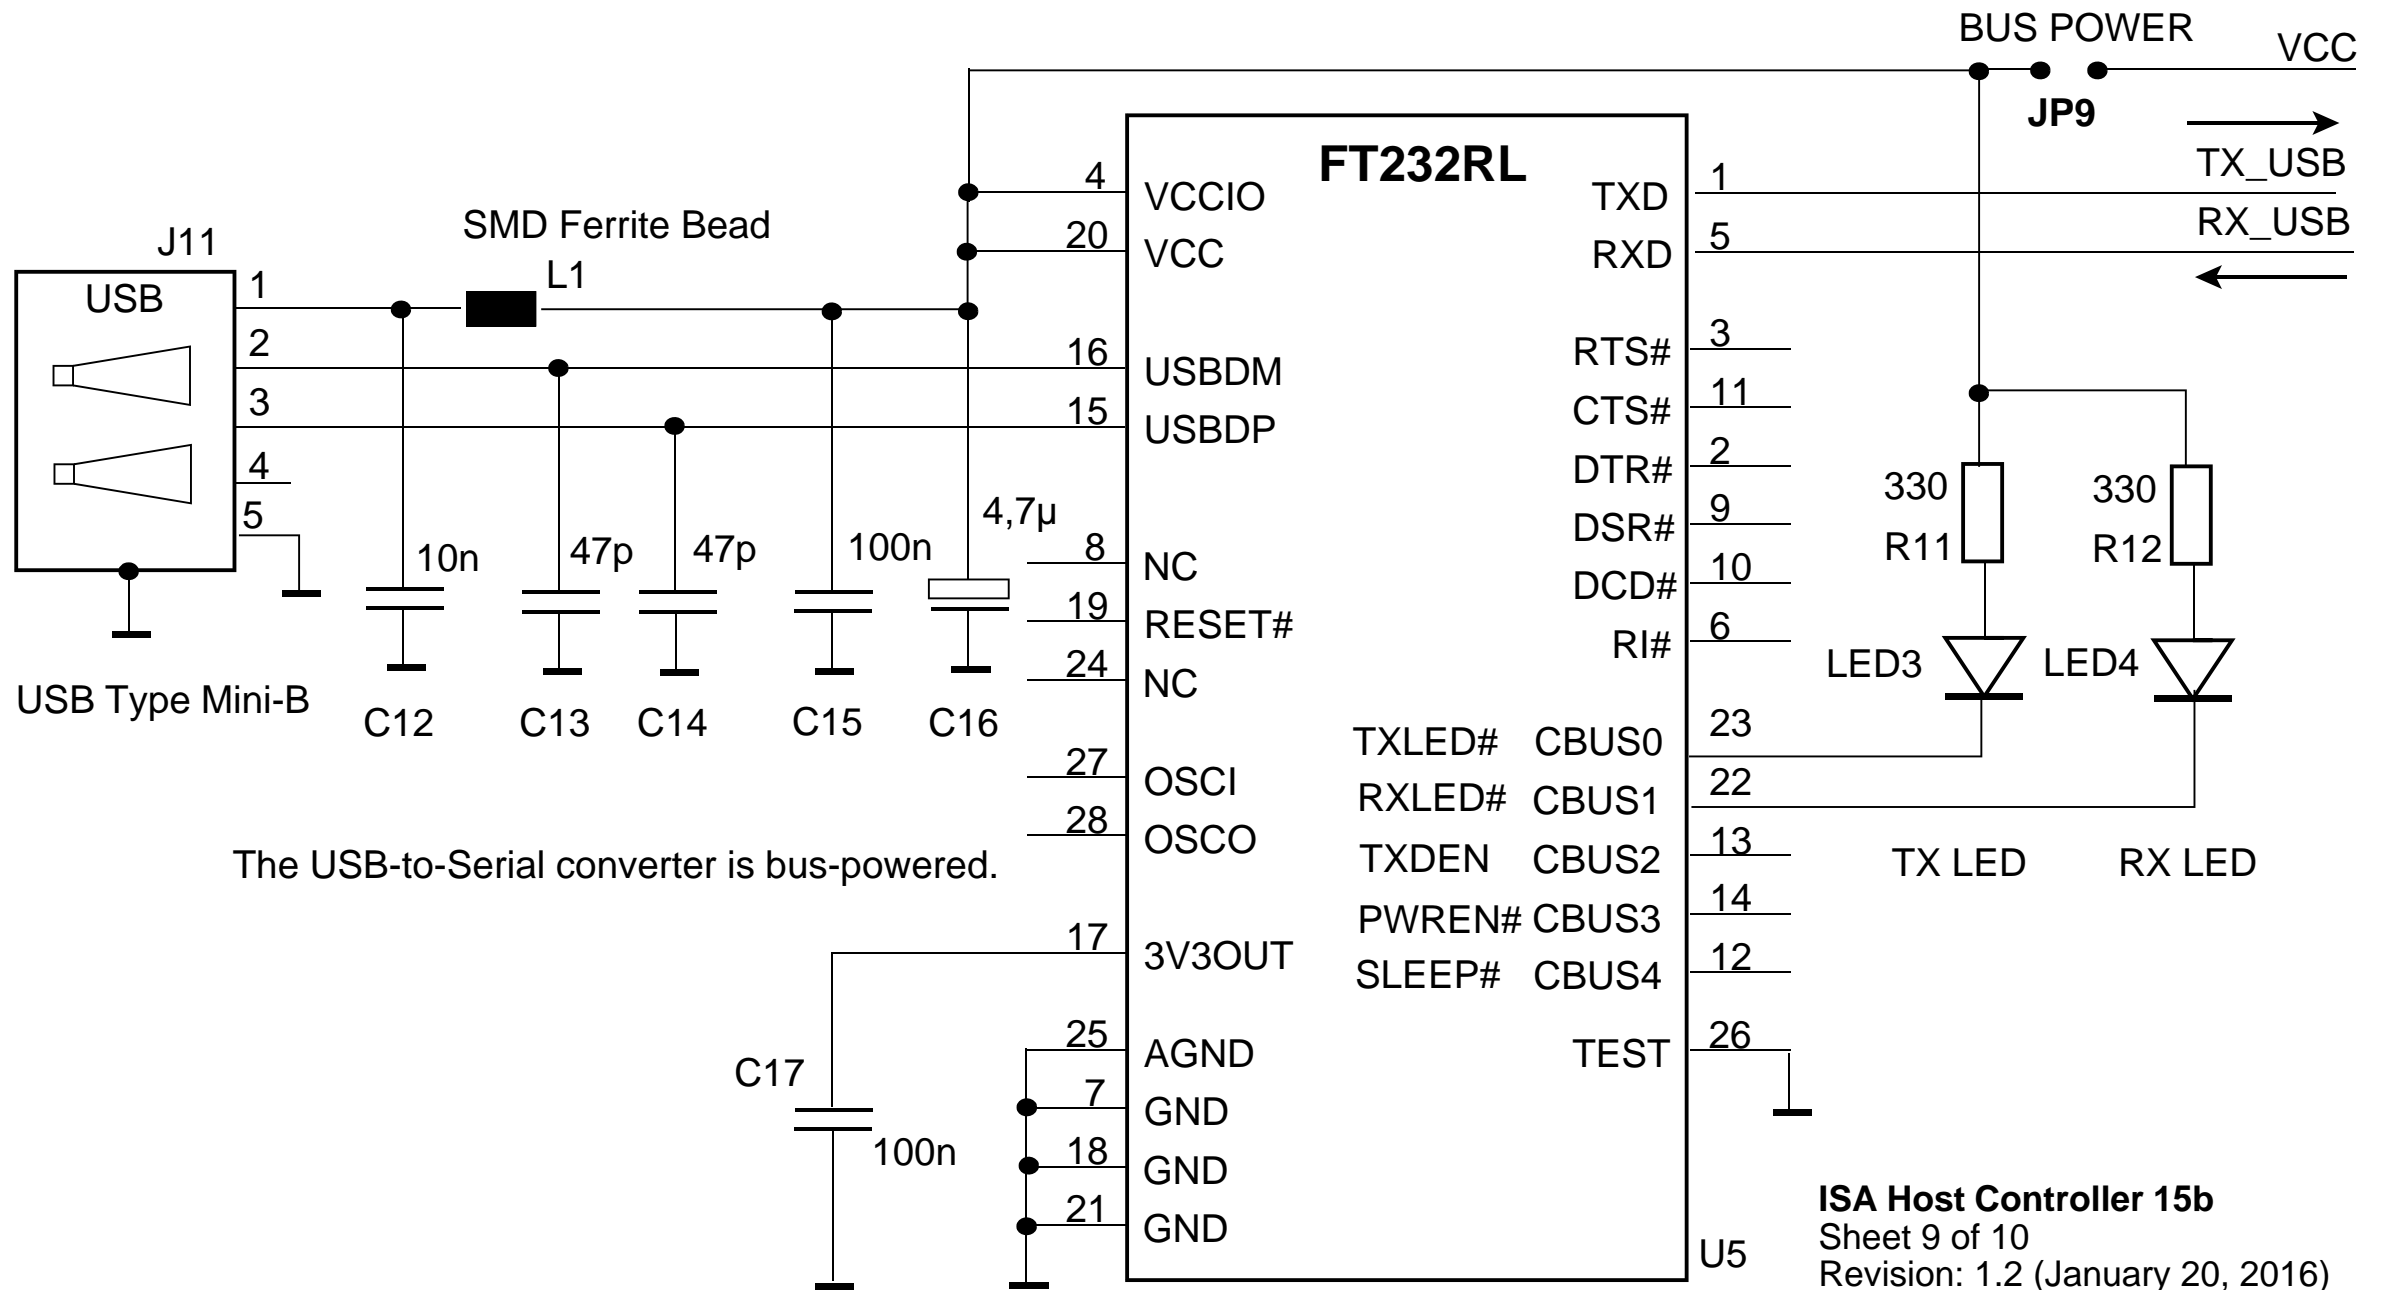

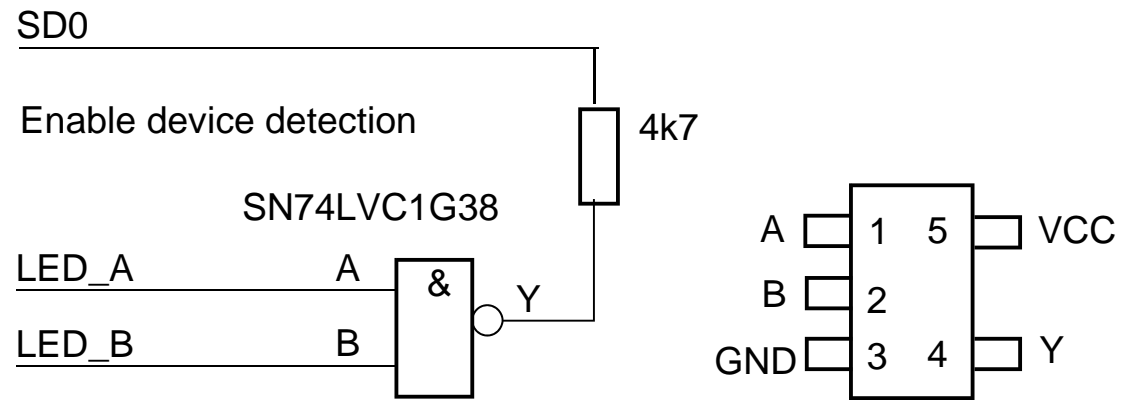

VCC terminal block

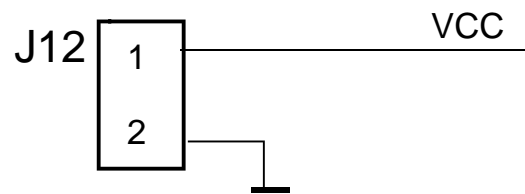

**ISA Host Controller 15b**

Sheet 10 of 10

Revision: 1.2 (January 20, 2016)